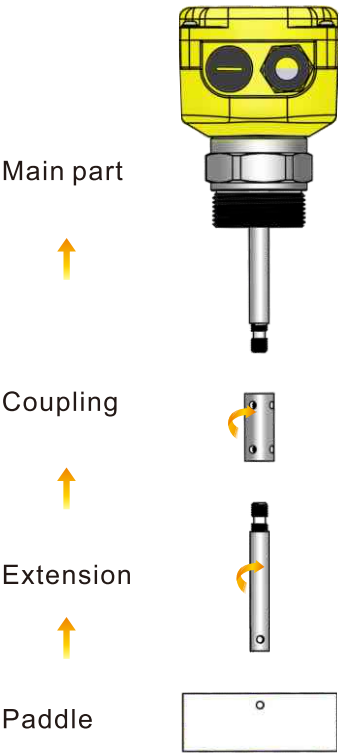


How to order modular type?


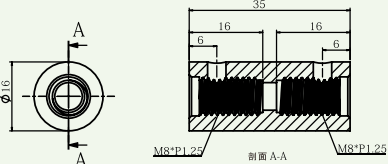
A	Main part
+	
B	Coupling
+	
C	Extension
+	
D	Process connection (optional)
+	
E	Paddle



Order Info for rotating paddle level switch


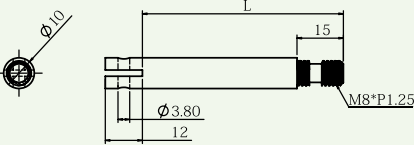
SR	P	10	C	B	0050	4
Series	Housing material	type	connection	power supply	main shaft length	shaft material

SR	standard rotating paddle level switch	shaft-protection rotating paddle level switch
P	Housing material : P: plastic housing (ABS) T: metal housing (aluminium alloy)	Housing material : P: plastic housing (ABS) T: metal housing (aluminium alloy)
10	type : 10: 80°C standard 20: 200°C high temperature 30: 450°Cextremely high temperature 11: 80°C modular 21: 200°C high temperature modular 31: 450°C high temperature modular	type : 50: 80°C shaft-protection standard 60: 200°C high temperature shaft-protection 70: 450°C extremely high temperature shaft protection
C	connection : A:3/4"PF B:G1" C:G1 1/2" "	connection : C:G1 1/2"
B	power supply : A: 24VAC B: 110-120VAC C: 220-240VAC	power supply : A: 24VAC B: 110-120VAC C: 220-240VAC
0050	main shaft length(mm) 0050: L=50mm	main shaft length(mm) 0200: L=200mm 0400: L=400mm 0600: L=600mm 0800: L=800mm
4	shaft material: 4: stainless 304 6: stainless 316	shaft material: 4: stainless 304 6: stainless 316



Coupling			
Order NO	stainless 304	stainless 316	drawing
	S4S0	S6S0	







extension shaft

extension shaft

Order NO	stainless 304	stainless 316	drawing
	L40150: L=150mm L40350: L=350mm L40550: L=550mm L40750: L=750mm L40950: L=950mm L41150: L=1150mm	L60150: L=150mm L60350: L=350mm L60550: L=550mm L60750: L=750mm L60950: L=950mm L61150: L=1150mm	

cable dimension

Order NO	stainless 304	drawing
	W41500: L=1500mm W42000: L=2000mm W42500: L=2500mm W43000: L=3000mm	

Paddle						
Order NO	T1型	T2型	T3型	L1型	L2型	N1型
drawing						
stainless 304	S4T1	S4T2	S4T3	S4L1	S4L2	S4N1
stainless 316	S6T1	S6T2	S6T3	S6L1	S6L2	S6N1
dimension	100×30×1.8	80×30×1.8	65×80×1.8	50×30×1.8	60×40×1.8	100×30×1.8

Connection accessories			
Flange	#45steel	S304	drawing
	S0F0	S4F0	
Fixture	#45steel		drawing
	S0C0		

How to order modular rotating paddle level switch:

note :

- 1.80℃, 200℃, 450℃ are all available for extension type with cable
- 2.when whole shaft length is over 1200mm, customers are suggested to choose extension type with cable .
3. Please kindly ensure the material of coupling , shaft (main shaft and extension shaft) and paddle to be the same.
4. If the max temperature is over 200℃, please kindly choose metal housing