



LZM Series Acrylic Flow Meter

LZM-4T、6T、8T

Outline Dimension(with regulator)

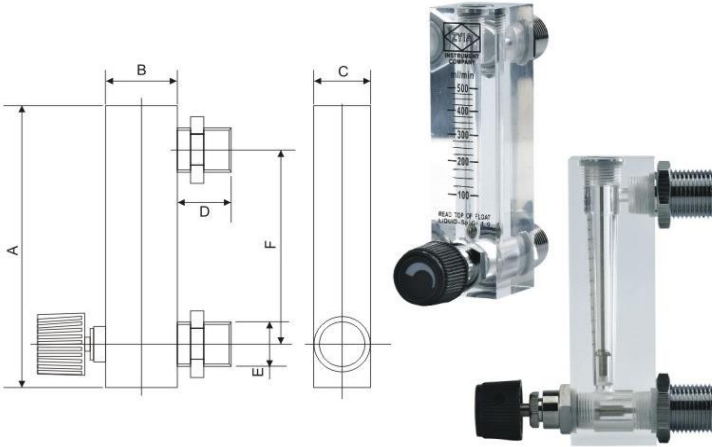

Outline Dimension(without regulator)

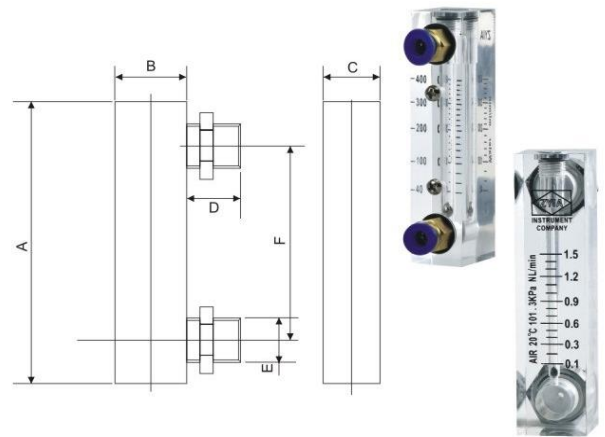

Technical Parameters of LZM-4T、6T、8T Series Flow Meter

Model	Range				Screw Thread	Accuracy	Size (mm)					
	MI/min (Liquid)	L/min (Gas)					A	B	C	D	E	F
LZM-4T	6-60 8-80 30-120 40-400	0.05-0.5 0.25-2.5 1-5	0.1-1 0.6-6 1-10	0.2-2 1-4 1-12	Direct Φ 6	±4%	94	27	21	14	14	70
LZM-6T	6-60 10-70GPH 16-160 25-250 80-400 100-500 100-600 200-800 100-1000	0.1-0.8 0.3-3 1-5 2-20 4-20 10-60 0.05-0.25m³/h 0.04-0.4 m³/h	0.1-1.5 0.4-4 1-12 3-15 5-25 10-70	0.1-1 0.5-8 2-10 3-30 6-30 10-100	(F) 1/4" BSP		102	30	25	20	M18x1.5	77
LZM-8T	2.5-25LPH 5-45LPH 6-60LPH	0.16-1.6 m³/h 0.1-1 m³/h 0.2-2 m³/h					110	25	25	20	M18x1.5	80


The material of LZM- 4T、6T、8T Series Flow Meter

With valve	Valve	Fitting	Float	O-ring
T-With O-No	√ 1.Brass 2.SS	1.ABS 2.PP 3.PVC 4.Brass √ 5.Brass chromeplate 6.SS	√ 1.SS 2.Acrylic 3.Agata ball 4.PTFE	√ 1.Silicon rubber 2.Fluorin rubber 3.Butyl

Note:Mark with √ , the material of the Flow Meter is the General Configuration

LZM Series Acrylic Flow Meter

LZM-Z Series

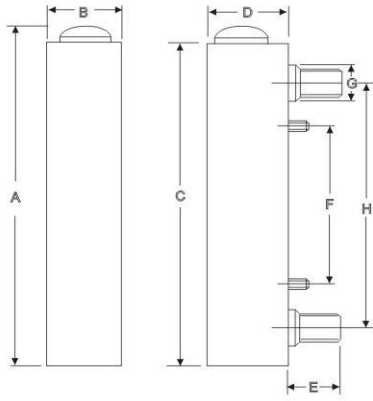

SS Fiting

Technical Parameters of LZM-Z Series Flow Meter

Model	Range			Screw Thread	Accuracy	Size (mm)							
	GPM (Liquid)	LPM (Liquid)	Nm ³ /h(Gas)			A	B	C	D	E	F	G	H
LZM-15ZA		15-150LPH	0.1-1 0.16-1.6 0.3-3 0.4-4	(M) 1/4" BSPT (F) 1/4" BSPT		157	32	150	35	25	60	25	110
LZM-15Z		10-100LPH 16-160LPH 25-250LPH	0.04-0.4 0.1-1 0.16-1.6 0.3-3 0.25-2.5 0.4-4	(M) 1/2" BSPT (F) 1/4" BSPT	±4%	175	32	168	35	25	76	25	127
	0.03-0.35	0.1-1.4	0.6-6 0.8-8										
	0.05-0.5	0.2-1.8	1-10 1.6-16										
	0.1-1	0.5-4	1.8-18 2-20										
	0.15-1.5	0.6-6	2.5-25 3-30										
	0.2-2	1-7	4-40										
	0.3-3	1-11											
	0.5-5	2-18											
LZM-25Z	1-10	5-35	2.5-15 2.5-25 4-40 6-60 10-100 20-100 16-160 25-250 30-300 35-350	(M) 1"BSPT		234	45	226	46	33	100	37	160
	1-15	5-50											
	2-14	10-50											
	2-20	10-70											
	5-35	10-130											
	5-40	10-150											
	5-45	10-170											
		0.3-2.1 m ³ /h 0.6-3 m ³ /h 0.6-4.2 m ³ /h											

The material of LZM-Z series Flow Meter

Fitting	Float	O-ring
✓ 1.ABS 2.PP 3.PVC 4.Brass 5.Brass chromeplate 6.SS	✓ 1.SS	✓ 1.Silicon rubber 2.Fluorin rubber 3.Butyl

Note:Mark with ✓, the material of the Flow Meter is the General Configuration